


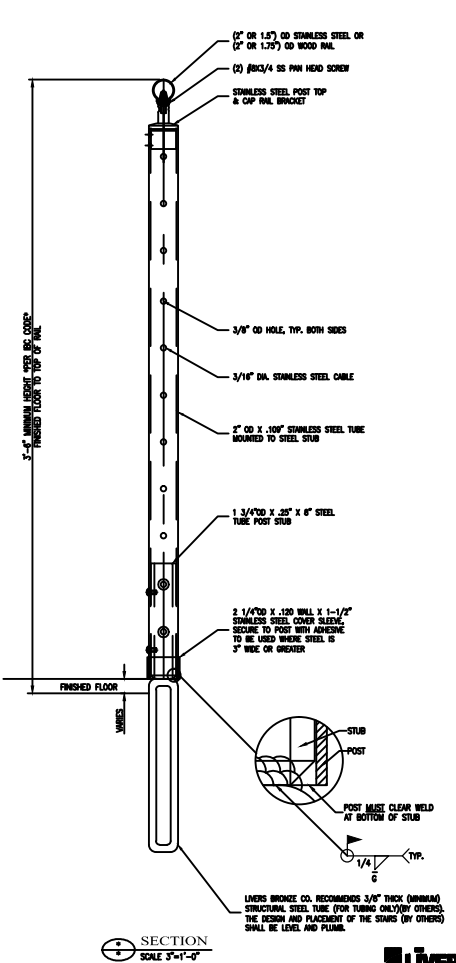


ELEVATION
SCALE 3/4"=1'-0"

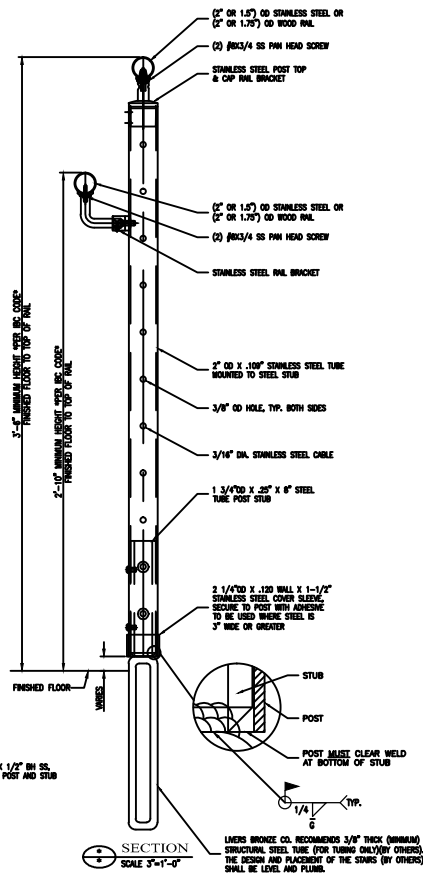


SECTION
SCALE 3/4"=1'-0"

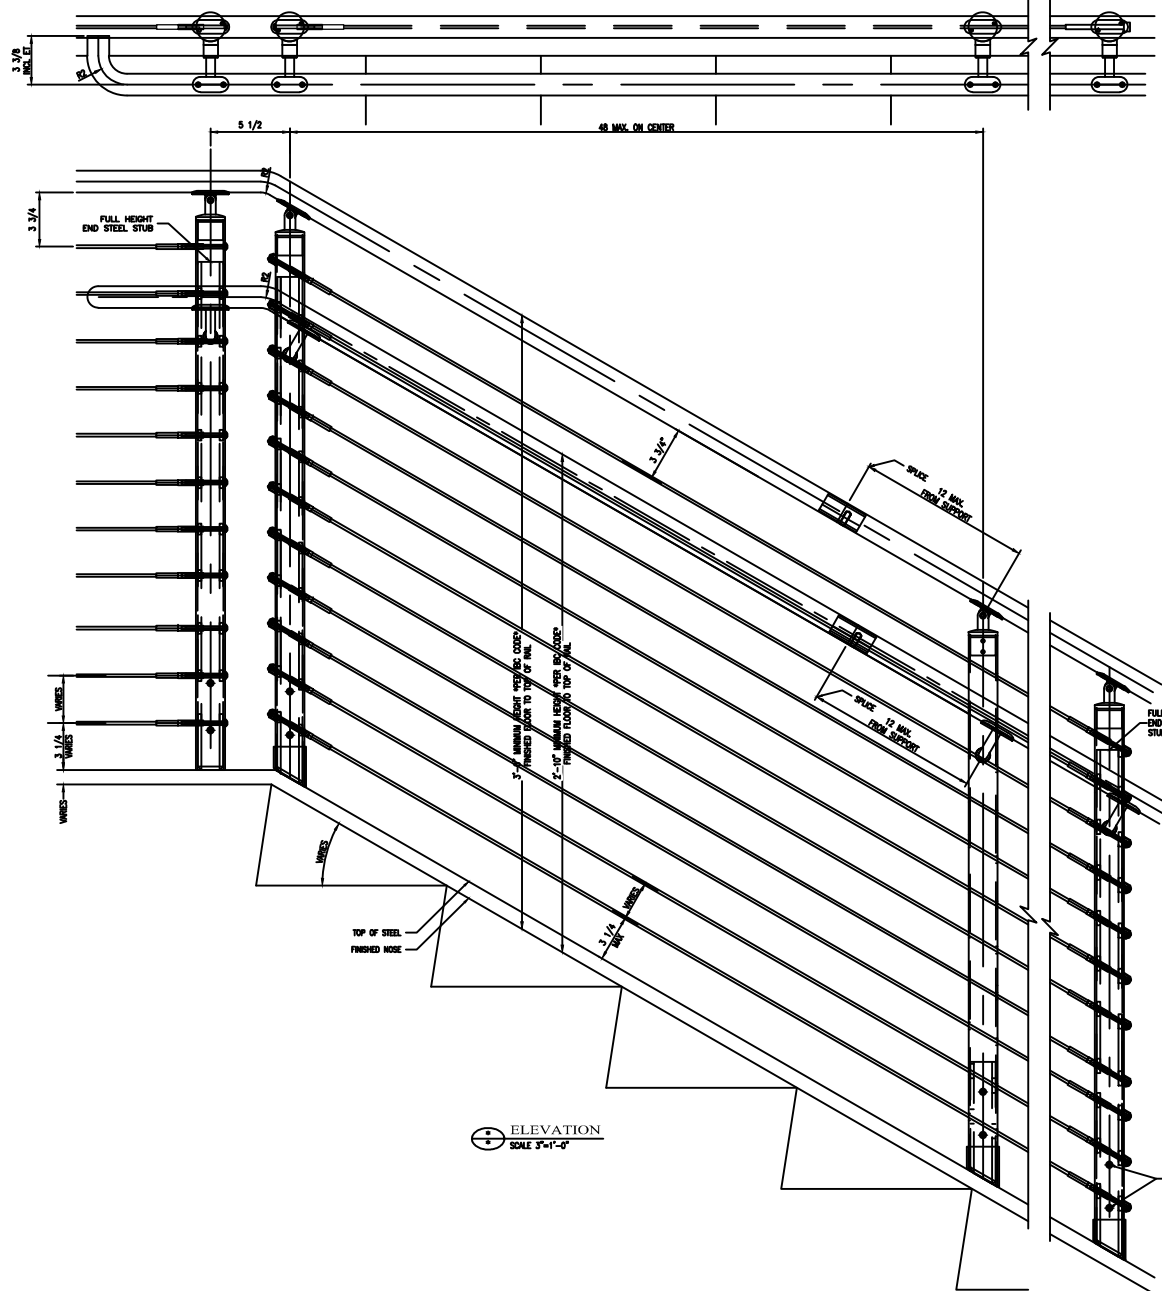


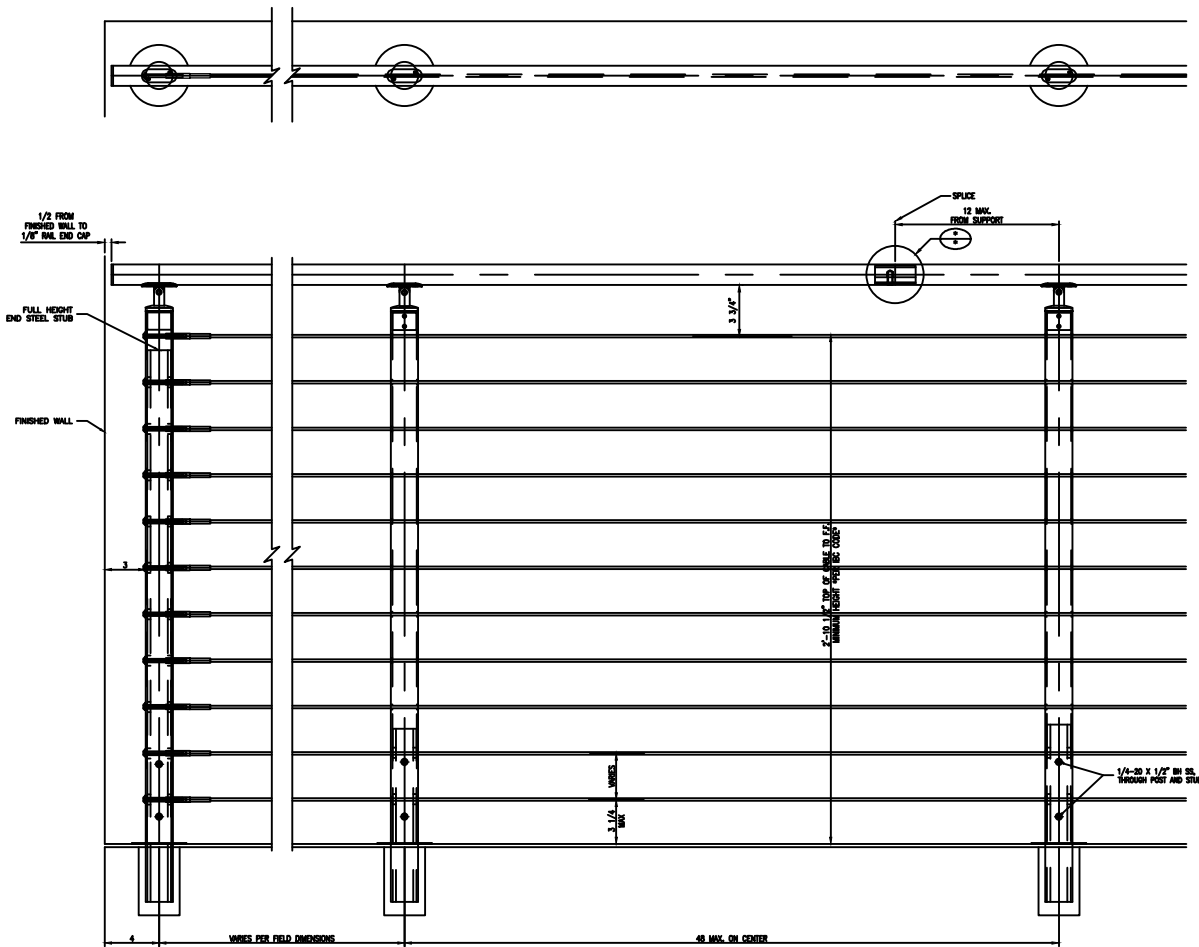


ELEVATION
SCALE 3/4"=1'-0"

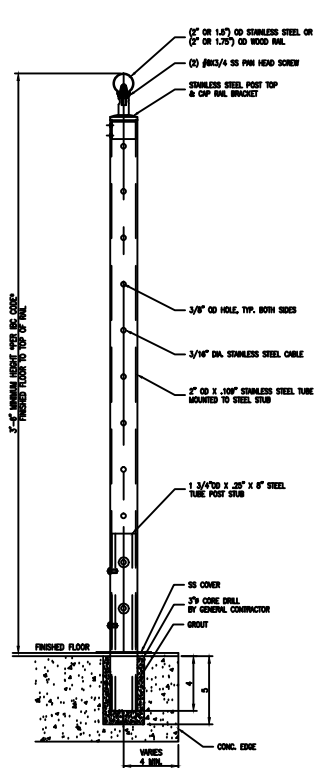



SECTION
3/4"=1'-0"

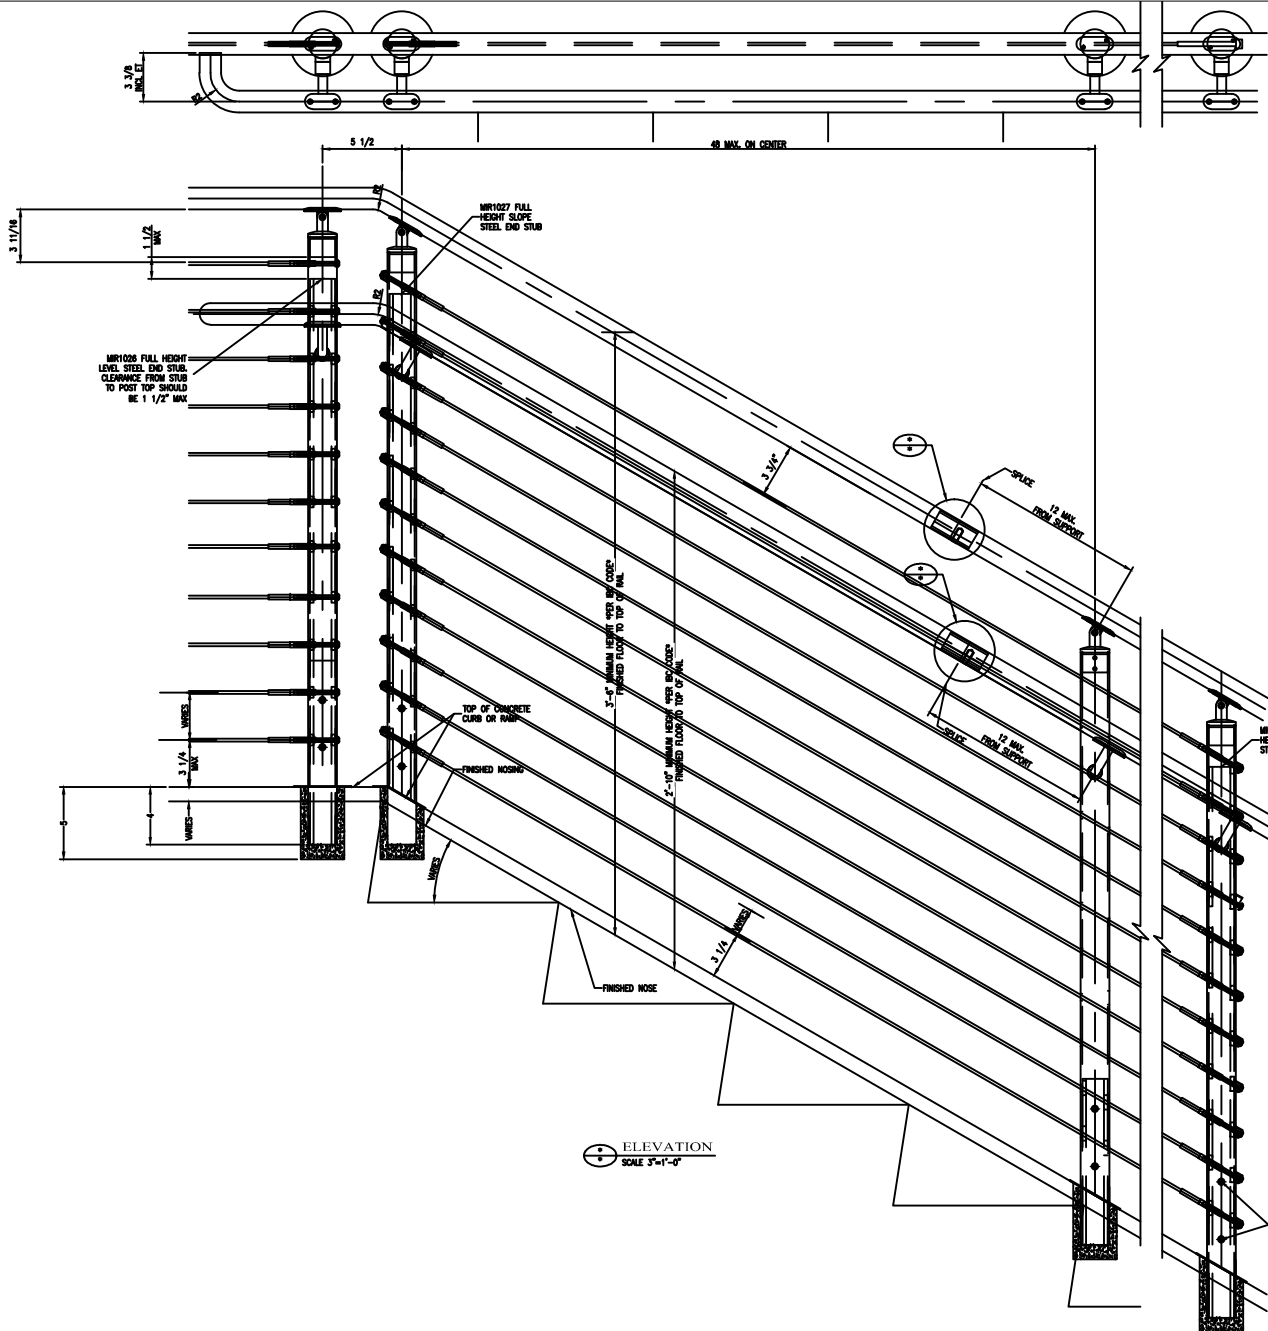


ELEVATION
SCALE 3/4"=1'-0"

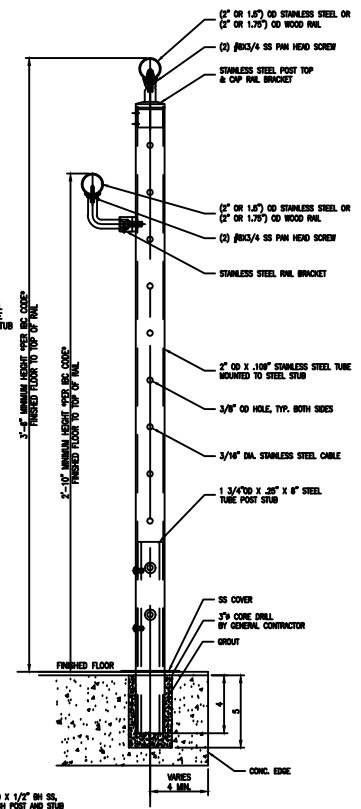


SECTION
SCALE 3/4"=1'-0"

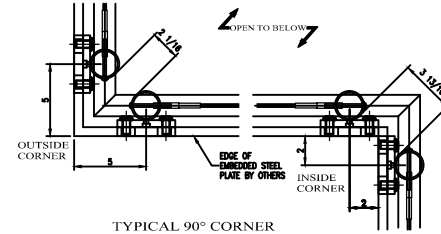

TYPICAL 90° CORNER
SCALE 3"=1'-0"

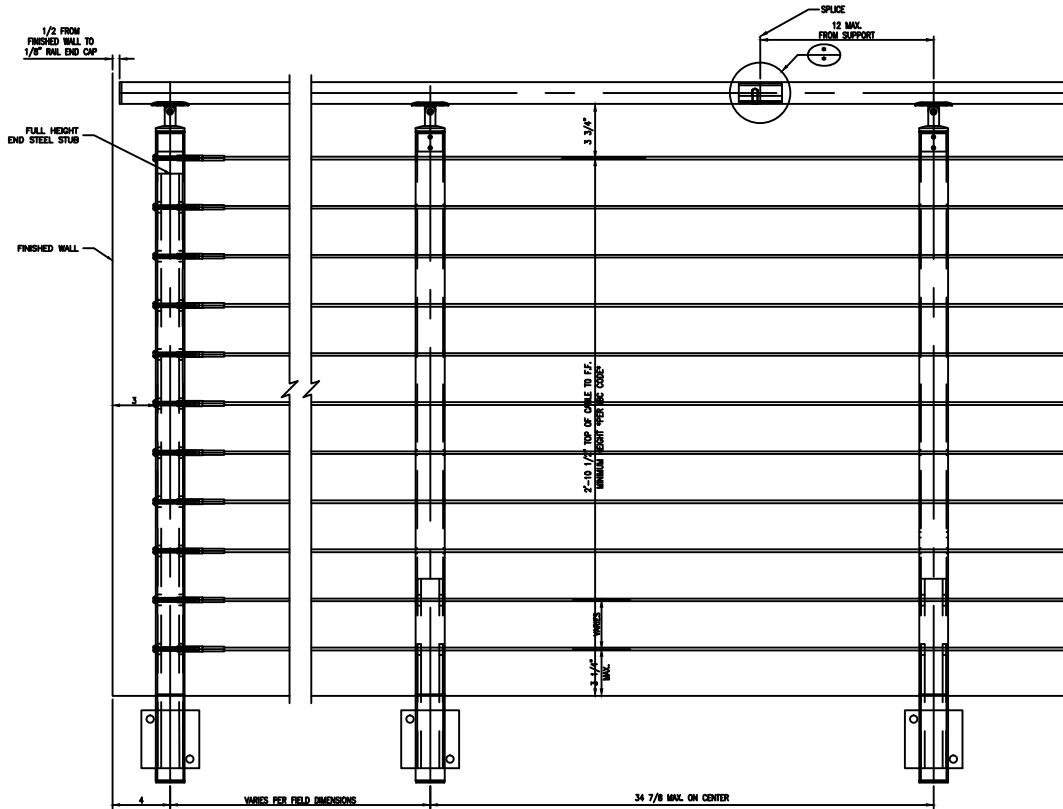


ELEVATION
SCALE 3"=1'-0"

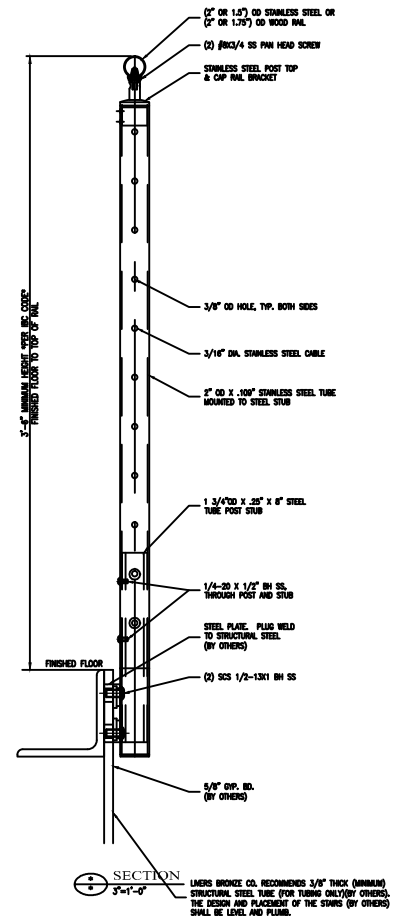


SECTION
SCALE 3"=1'-0"

LIERS BRONZE CO. RECOMMENDS 3/8" THICK (MINIMUM) STRUCTURAL STEEL TUBE (FOR TUBING ONLY) (BY OTHERS). THE BEGINNING AND PLACEMENT OF THE SWAGES (BY OTHERS) SHALL BE LEVEL AND PLUMB.

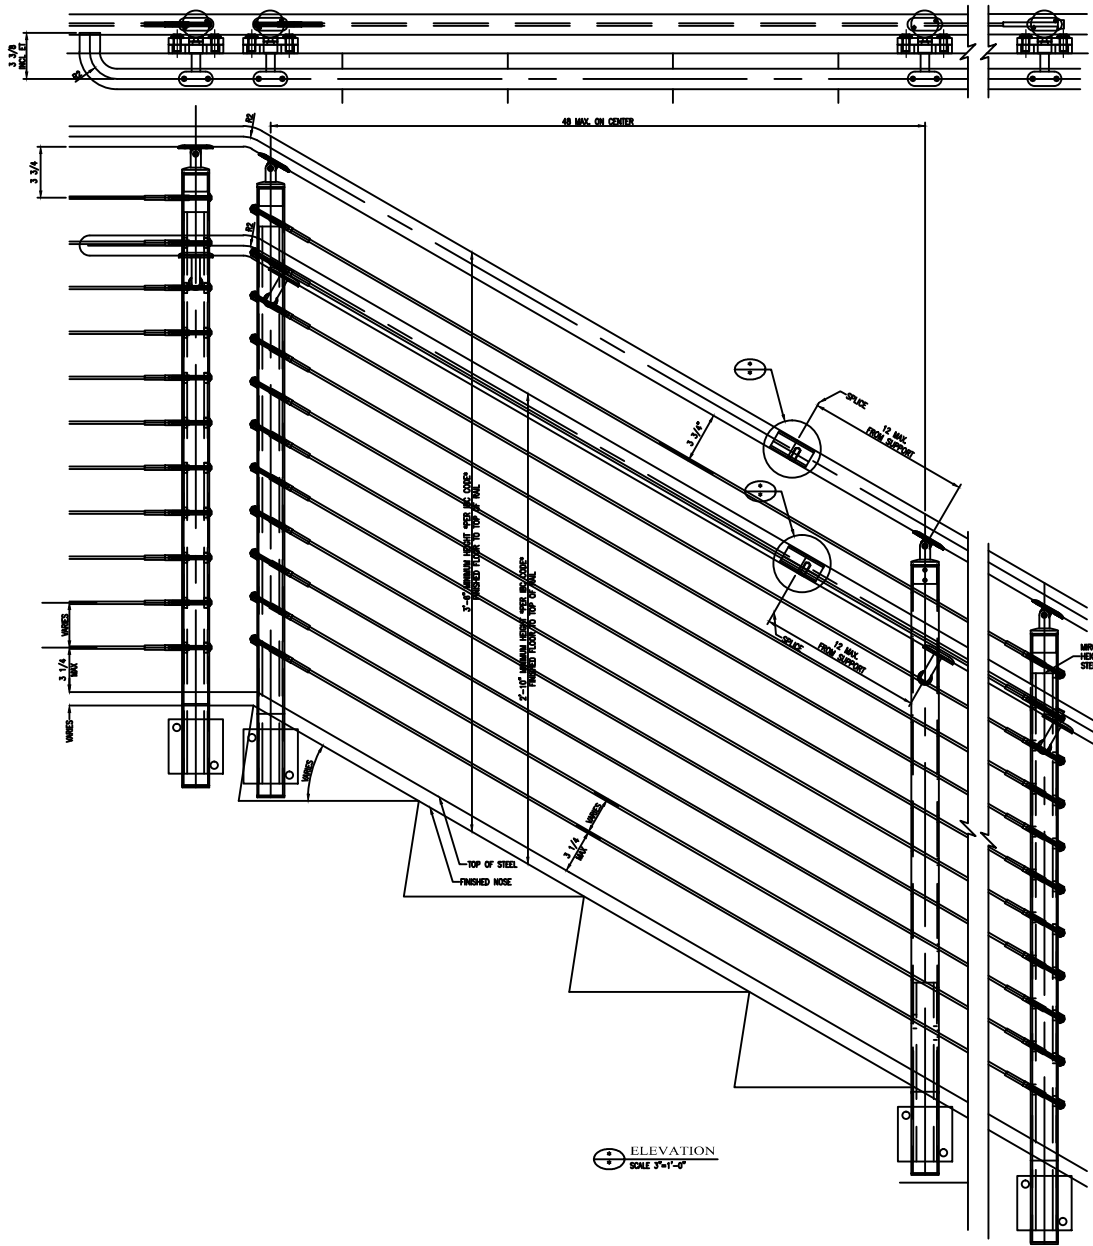


ELEVATION
SCALE 3/4"=1'-0"

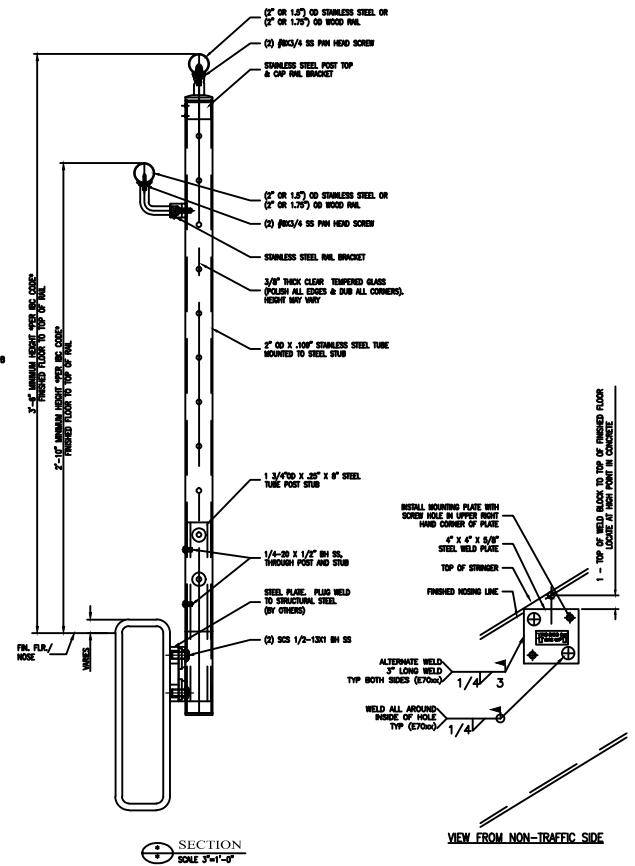


SECTION
SCALE 3/4"=1'-0"

VIEW FROM NON-TRAFFIC SIDE


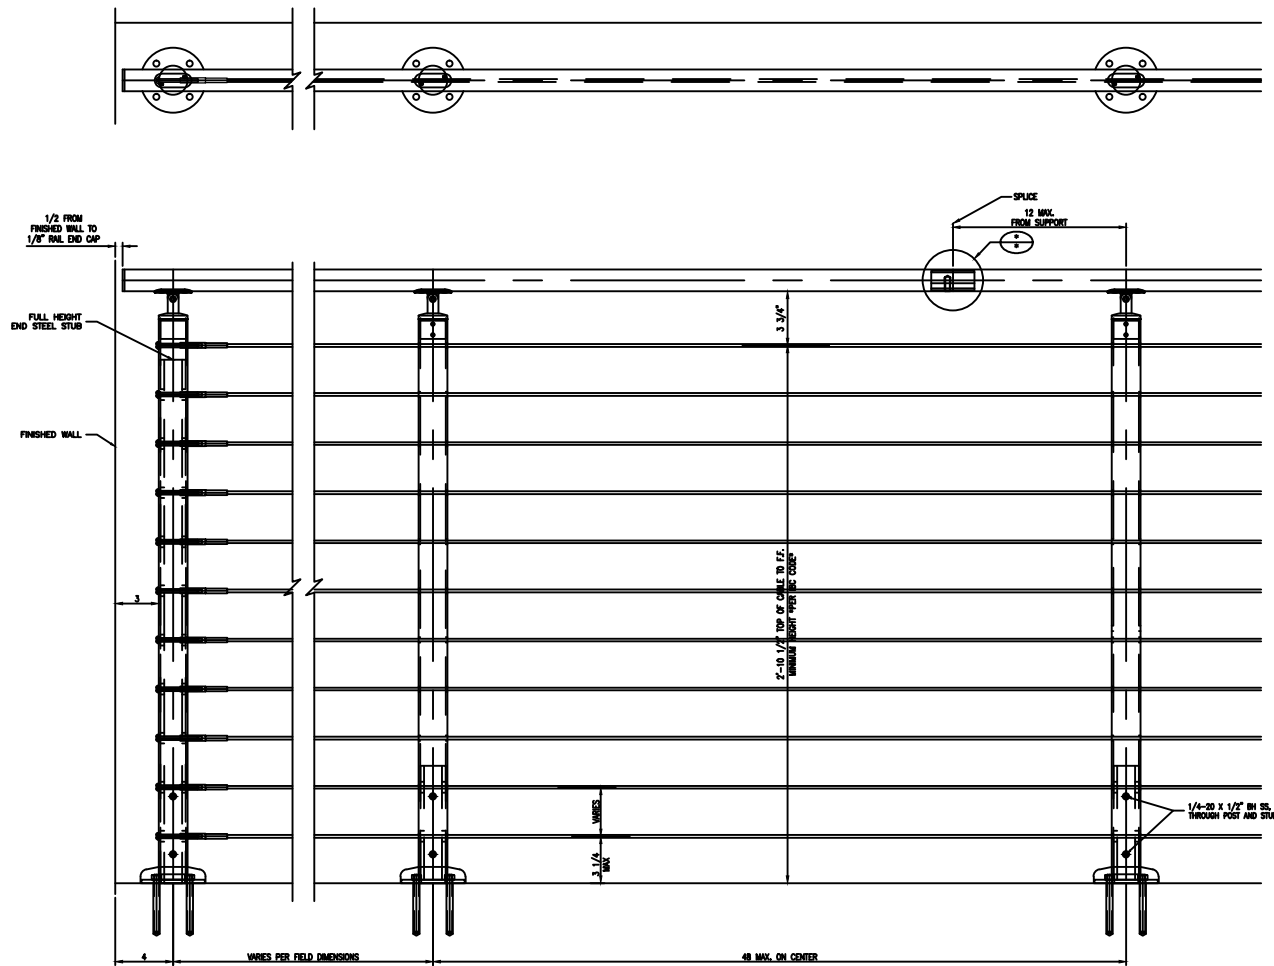


ELEVATION
SCALE 3/4"=1'-0"

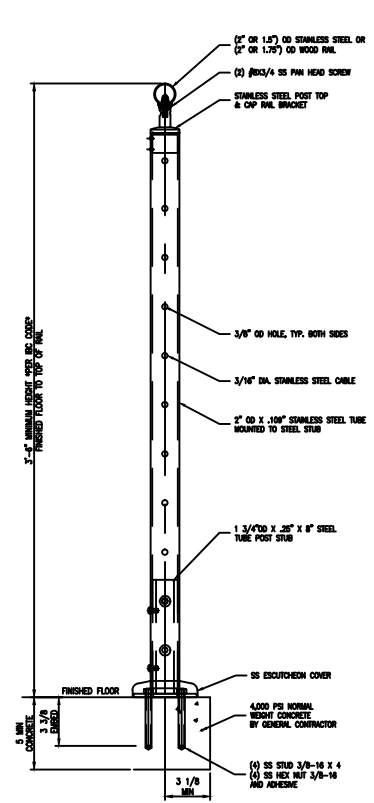

SECTION
SCALE 3/4"=1'-0"

RB1051-10 POST BRKT DETAIL

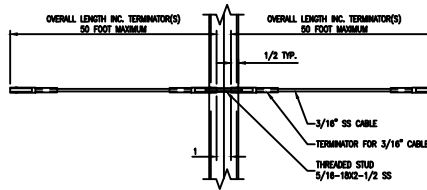

LEVEL CABLE CONDITION
USE WHEN CABLE SPAN
MUST BE GREATER THAN
50 FT